


## GÜDE safety washers for sem screws



**Safe your  
sem screws!**

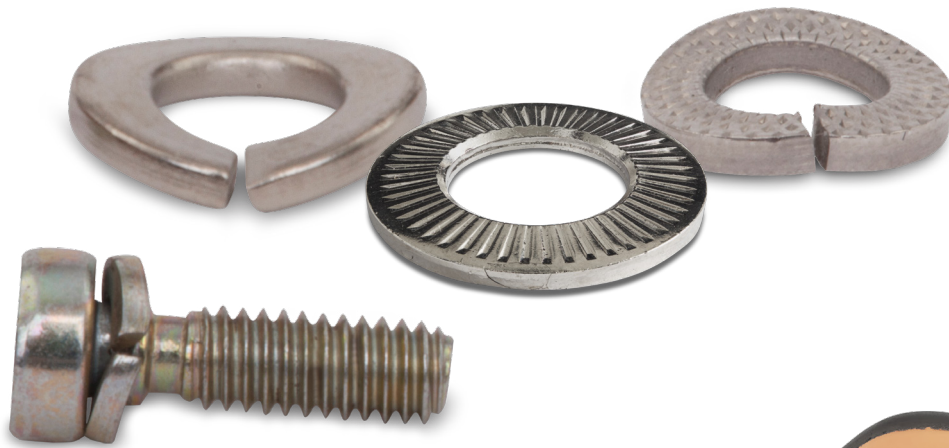


**your contact:**  
Dennis Zöller  
verkauf@guede.net

**Güde GmbH**  
Dieselstraße 8  
D-58840 Plettenberg

**Tel.:** +49 2391 - 91 90-0  
**Fax:** +49 2391 - 91 90-91  
info@guede.net



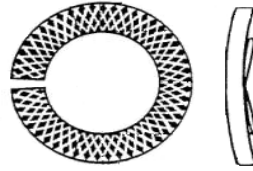

**Sperrkant Spring Washer Sem**

**Dimensions and Specifications**

For screws of	d min.-max.	D max.	s min.-max.	b min. - max	h min.-max.	Weight kg/1000 pcs.	Packaging
4	3,60-3,75	6,95	0,70-0,90	1,40-1,60	1,20-1,40	0,15	100.000
5	4,55-4,75	8,55	0,90-1,10	1,70-1,90	1,50-1,70	0,30	50.000
6	5,50-5,70	11,00	1,20-1,40	2,35-2,65	2,00-2,20	0,64	25.000
8	7,40-7,65	13,95	1,50-1,70	2,85-3,15	2,45-2,75	1,23	10.000
10	9,30-9,55	16,95	1,70-1,90	3,30-3,70	2,85-3,15	2,00	5.000
12	11,0-11,3	19,70	1,95-2,25	3,80-4,20	3,35-3,65	3,10	2.500

Special features:	grid shaped surface ("Sperrkanten") wire profile alternately bend apex of the dome between 135°-150° 5-times deflected	technical specifications according to DIN 6905
Finishings:	oiled other raw material and coatings on inquiry	

**sperrkant spring washer  
=  
DIN 6905 +  
double-side sperrkant**

**=> locking effect through  
embossed blocking edges**

